

How to install 2.5" SATA HDD into EBOX-333x.

1. Prepare screw drivers in three different types.



2. Remove four screws from the unit bottom.



3. Remove two screws next to the VGA port at rear side.



4. Remove the top case.




5. Remove the U type case.



6. Now, the EBOX is dismantled.



7. Remove the board, can keep the power line connected.

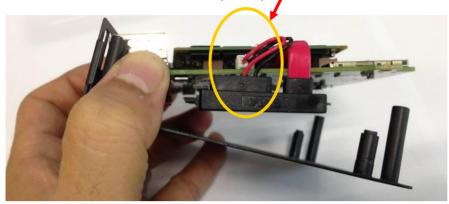




8. Connect the SATA cable and the SATA hard disk.



9. Connect the cable to the HDD connector.

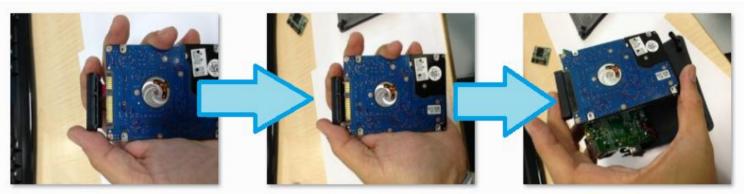








10. It looks like this.

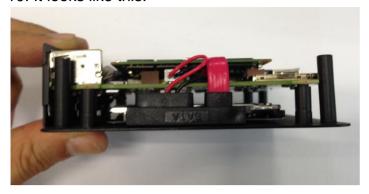

11. Use the screws included with EBOX to secure the HDD.





12. Put the case back, Done.

